
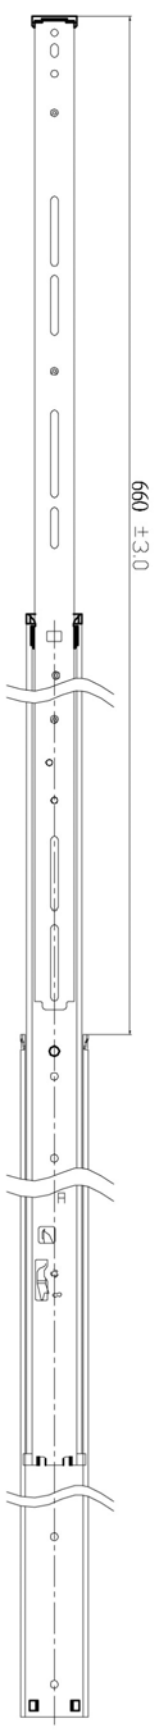
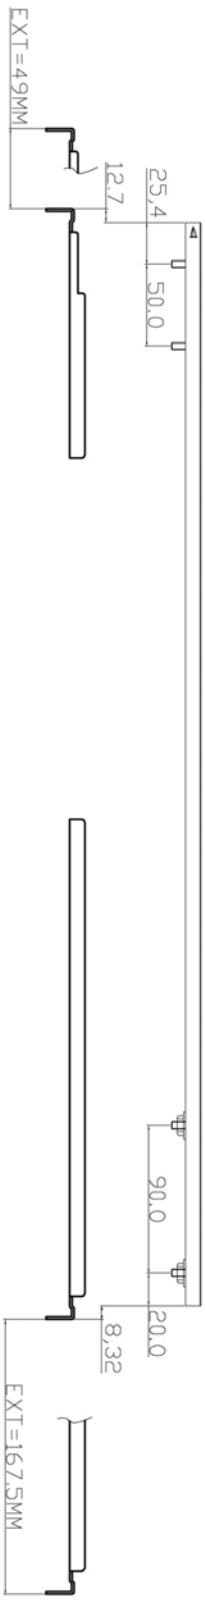
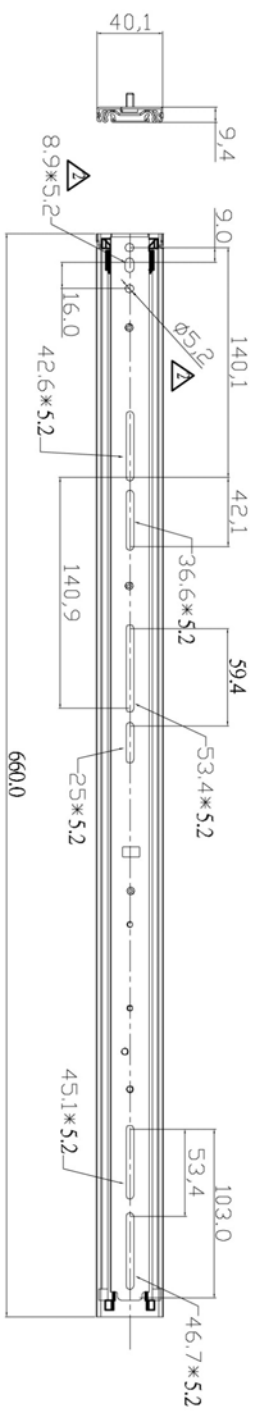

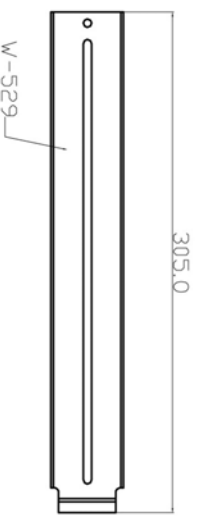


REV	DATE	DESCRIPTION	DRW
△	951122	C95136	MARK
△	960110	C96007/C95152	MARK



NOTES:

1. MATERIAL, SLIDE MEMBERS AND COMPONENT PARTS WORK - HARDENED, COLD - ROLLED STEEL.
2. BALL BEARINGS, CARBURIZED STEEL.
3. LUBRICANT: ANTIWEAR AND EXTREME PRESSURE PROPERTIES.
4. FINISH: ELECTRO - ZINC PLATED.
5. CHROMATIC COATED CLEAR OR BLACK.
5. DISCONNECTED DESIGN.

6. THE FIRST INSTALLATION OF THE RAIL INTO THE SLIDE MUST BE LESS THAN 10 LBS FORCE.

7. FULL FORCE 2 TO 4 LBS.

8. TOLERANCES ARE FOLLOWS UNLESS OTHERWISE SPECIFIED.

.XX 40.30
.X 40.76
HOLES 40.15
ANGLE ±1°

DRW: MARK DATE: 2006/09/19

CHKD: MARK CUSTOMER P/N:

APPD: CUSTOMER

MATERIAL: FINISH: C13+

SCALE: 1:1

UNIT: inch

AMERI-RACK TECHNOLOGY, INC.

MODEL: ASL-2608GT TITLE: DRAWING ASS'Y

P/N: D/N: SHEET 1 OF 1 REV: R2